



SENSING AND CONTROL

Product Range Guide

For innovation that's well apart, there's only Honeywell Sensing and Control.

With more than 50,000 products ranging from snap-action, limit, toggle, and pressure switches to position, speed, pressure, and airflow sensors, Honeywell Sensing and Control (S&C) has one of the broadest sensing and switching portfolios available.

Honeywell sensor, switch, and control components are tailored to exact specifications for stronger performance, longer productivity, and increased safety. Enhanced accuracy and durability are built into every part, improving output and endurance. For our customers, this can reduce expenditures and operational costs. Our global footprint and channels help to competitively price such components for your chosen application and provide immediate technical support.

Our expertise in aerospace and defense, transportation, medical, and industrial industries means we offer products and solutions for a wide range of applications. But, an impressive product line is only one part. We possess unique engineering expertise and value-added capabilities.

While Honeywell's switch and sensor solutions are suitable for a wide array of basic and complex applications, our custom-



engineered solutions offer enhanced precision, repeatability, and ruggedness. We offer domain knowledge and technology resources, along with a close working relationship, to develop and deliver cost-effective, individually tailored solutions. Whether clean-slate development or simple modifications to an existing design are needed, our expertly engineered solutions help to meet the most stringent requirements with worldclass product designs, technology integration, and customer-specific manufacturing.


With a 75-year legacy in the switch and sensor business, Honeywell S&C has earned a reputation for reliability and excellence. Our strong product designs, Six Sigma Plus manufacturing environment, and robust testing facilities help provide quality out of the box, as well as enhanced, sustainable performance down the line.

Global service, sourcing, and manufacturing. Industry-leading engineers. Value-added assemblies and solutions. Construction to required specifications. A one-stop, full-service, globally competitive supplier... Honeywell Sensing and Control.


Table of Contents

| | | | |
|--|-------|---|-------|
| Airflow Sensors | 3-4 | Silicon Pressure Sensors, Low Pressure Flow-Through | 12-13 |
| Force Sensors | 5 | Stainless Steel Media Isolated Pressure Sensors | 14-15 |
| Silicon Pressure Sensors, Ultra Low | 6-9 | Honeywell S&C Core Industry Segments | 16-17 |
| Silicon Pressure Sensors, Low to Mid | 10-13 | Honeywell S&C Product Portfolio | 18-19 |

Airflow Sensors

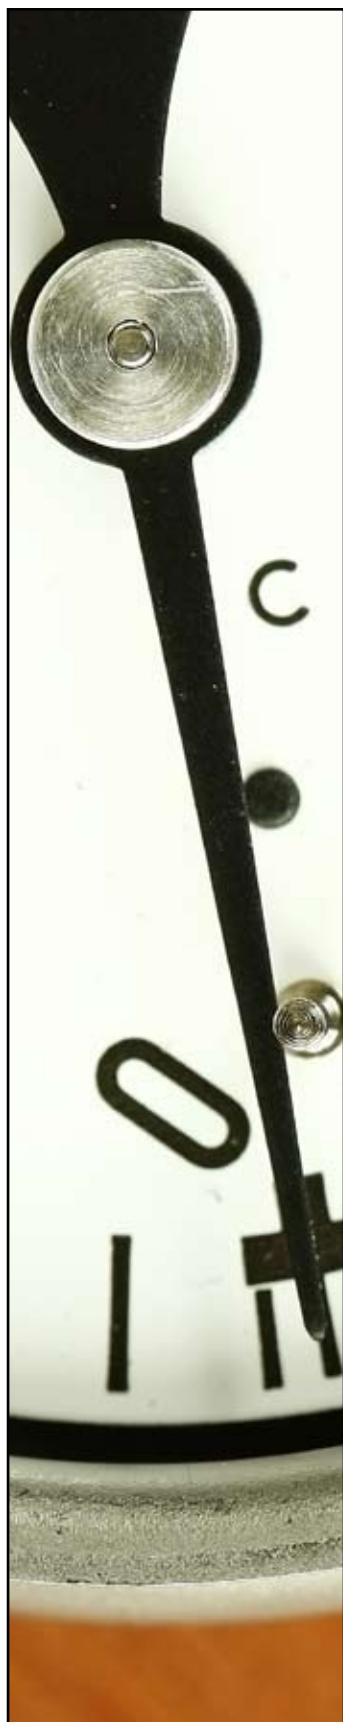

Contains advanced microstructure technology to provide a sensitive and fast response to flow, amount/direction of air or other gases. Potential applications include HVAC, gas metering, chromatography, vent hoods, and medical equipment.

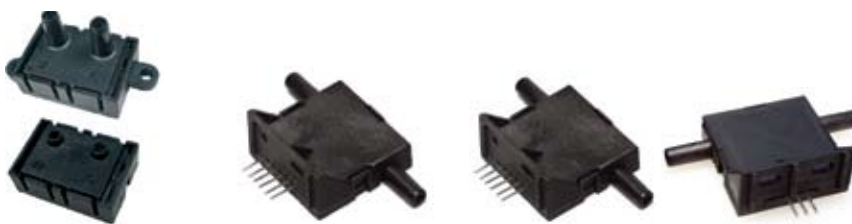

| Series | Honeywell Zephyr™ HAF | AWM1000 | AWM2000 | AWM3000 |
|------------------------------------|---|--|--|--|
| Signal conditioning | amplified | unamplified | unamplified | amplified |
| Technology | silicon die with thermally isolated heater | silicon die | silicon die | silicon die |
| Flow/pressure range | 200 SCCM | ±200 SCCM; 1000 SCCM to -600 SCCM; ±5.0 mbar [2.0 in H ₂ O]; ±10.0 mbar [4.0 in H ₂ O] | ±30 SCCM; ±1000 SCCM; ±10.0 mbar [4.0 in H ₂ O] | 30 SCCM; 200 SCCM; 1000 SCCM; 0 mbar to 1.25 mbar [0 in H ₂ O to 0.5 in H ₂ O]; 0 mbar to 5.0 mbar [0 in H ₂ O to 2 in H ₂ O]; 5.0 mbar [2.0 in H ₂ O] |
| Power consumption | 23 mW typ. @ 3.3 Vdc 38 mW typ. @ 5.0 Vdc | 30 mW typ. | 30 mW typ. | 50 mW or 100 mW typ. |
| Port style | long port, short port | straight | straight | straight |
| Media compatibility | dry non-corrosive gases | dry gas only | dry gas only | dry gas only |
| Operating temperature range | -20 °C to 70 °C [-4 °F to 158 °F] | -25 °C to 85 °C [-13 °F to 185 °F] | -25 °C to 85 °C [-13 °F to 185 °F] | -25 °C to 85 °C [-13 °F to 185 °F] |
| Measurements (H x W x D) | long port: 20 mm x 36 mm x 19,9 mm [0.79 in x 1.42 in x 0.78 in] short port: 17,6 mm x 28,8 mm x 19,9 mm [0.69 in x 1.13 in x 0.78 in] | 12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in] | 12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in] | 12,7 mm x 54,4 mm x 31,5 mm [0.5 in x 2.14 in x 1.24 in] |
| Features | high accuracy; high sensitivity at very low flows; high stability; low pressure; linear output; customizable; full calibration and temperature compensation | sensitivity to low flows; enhanced response time; low power consumption; analog output; bidirectional sensing capability | sensitivity to low flows; enhanced response time; low power consumption; analog output; bidirectional sensing capability | sensitivity to low flows; fast response time; low power consumption; analog output; amplified |

Airflow Sensors

Contains advanced microstructure technology to provide a sensitive and fast response to flow, amount/direction of air or other gases. Potential applications include HVAC, gas metering, chromatography, vent hoods, and medical equipment.



| Series | AWM5000 | AWM700 |
|------------------------------------|---|---|
| Signal conditioning | amplified | amplified |
| Technology | silicon die | silicon die |
| Flow/pressure range | 0 SLPM to 5.0 SLPM; 0 SLPM to 10.0 SLPM; 0 SLPM to 15.0 SLPM; 0 SLPM to 20.0 SLPM | 200 SLPM |
| Power consumption | 100 mW max. | 60 mW max. |
| Port style | 1/4 in-18 NPT | 22 mm tapered |
| Media compatibility | dry gas only | dry gas only |
| Operating temperature range | -20 °C to 70 °C [-4 °F to 158 °F] | -25 °C to 85 °C [-13 °F to 185 °F] |
| Measurements (H x W x D) | 35,6 mm x 162,8 mm x 32,3 mm [1.40 in x 6.41 in x 1.27 in] | 33,8 mm x 22,9 x 37,0 mm [1.33 in x 0.90 in 1.40 in] |
| Features | sensitivity to low flows; enhanced response time; low power consumption; analog output; laser trimmed | sensitivity to low flows; enhanced response time; low power consumption; analog output; highly stable |



| Series | AWM40000 | AWM90000 |
|------------------------------------|---|--|
| Signal conditioning | unamplified or amplified | unamplified |
| Technology | silicon die | silicon die |
| Flow/pressure range | ±25.0 SCCM; 1.0 SLPM; 6.0 SLPM | ±200 SCCM; ±5.0 mbar [2.0 in H ₂ O] |
| Power consumption | 60 mW max. or 75 mW max. | 50 mW typ. |
| Port style | manifold | parallel |
| Media compatibility | dry gas only | dry gas only |
| Operating temperature range | -40 °C to 125 °C [-40 °F to 251 °F] (inclusive) | -25 °C to 85 °C [-13 °F to 185 °F] |
| Measurements (H x W x D) | 12,7 mm x 30,5 mm x 30,2 mm [0.50 in x 1.2 in x 1.19 in] | 13,08 mm x 30,48 mm x 27,94 mm [0.52 in x 1.2 in x 1.1 in] |
| Features | sensitivity to low flows; enhanced response time; low power consumption, analog output; laser trimmed | sensitivity to low flows; fast response time; low power consumption; analog output; bidirectional sensing capability |

Force Sensors



Measures the addition or backup of force, meaning the resistance of silicon-implanted piezoresistors will increase when flexed under applied force. Potential applications include infusion pumps, anesthesia monitors, blood pressure equipment, and more.




| Series | 1865 | FS01/FS03 |
|-----------------------------|---|---|
| Signal conditioning | calibrated | amplified |
| Technology | silicon die (piezoresistive) | silicon die (piezoresistive) |
| Force range | 0 psi to 5 psi, 0 psi to 10 psi, 0 psi to 15 psi, 0 psi to 25 psi, 0 psi to 30 psi | 0 lb to 1.5 lb, 0 lb to 3.0 lb |
| Overforce | 10 psi, 30 psi, 45 psi, 60 psi | 7 lb |
| Linearity | 0.10 % FS typ., BFSL; 0.25 % FS max., BFSL | 1.0 % FS typ., BFSL; 3.0 % FS max., BFSL |
| Operating temperature range | -28 °C to 54 °C [-18 °F to 129 °F] | 0 °C to 70 °C [32 °F to 158 °F] |
| Storage temperature range | -1 °C to 54 °C [30 °F to 129 °F] | 5 °C to 50 °C [41 °F to 122 °F] |
| Measurements (H x W x D) | 7,62 mm x 17,145 mm x 17,145 mm [0.30 in x 0.675 in x 0.675 in] | 8,26 mm x 17,27 mm x 25,1 mm [0.325 in x 0.68 in x 0.988 in] |
| Features | pressure measurement for liquid media; 8-pin DIP electrical connection; laser trimmed | high-level output range; calibrated zero and span |



| Series | FSG | FSS | FSS-SMT |
|-----------------------------|---|--|--|
| Signal conditioning | unamplified | unamplified | unamplified |
| Technology | silicon die (piezoresistive) | silicon die (piezoresistive) | silicon die (piezoresistive) |
| Force range | 0 N to 14,7 N [0 g to 1500 g] | 0 N to 14,7 N [0 g to 1500 g] | 0 N to 14,7 N [0 g to 1500 g] |
| Overforce | 54 N [5500 g] | 44 N [4500 g] | 44 N [4500 g] |
| Linearity | 0.5 % span typ., BFSL | ±1.5 % span, BFSL | ±1.5 % span, BFSL |
| Operating temperature range | -40 °C to 85 °C [-40 °F to 185 °F] | -40 °C to 85 °C [-40 °F to 185 °F] | -40 °C to 85 °C [-40 °F to 185 °F] |
| Storage temperature range | -55 °C to 105 °C [-67 °F to 221 °F] | -40 °C to 100 °C [-40 °F to 212 °F] | -40 °C to 100 °C [-40 °F to 212 °F] |
| Measurements (H x W x D) | 9,0 mm x 12,7 mm x 18,2 mm [0.35 in x 0.50 in x 0.71 in] | 3,25 mm x 9,14 mm x 3,81 mm [0.13 in x 0.36 in x 0.15 in] | 3,41 mm x 5,6 mm x 13,7 mm [0.134 in x 0.22 in x 0.54 in] |
| Features | precision force sensing; ratio-metric output; available signal conditioning | precision force sensing; ratio-metric output; adaptable product design | precision force sensing; ratio-metric output; adaptable product design |

Silicon Pressure Sensors

Ultra Low Pressure (<1 psi)

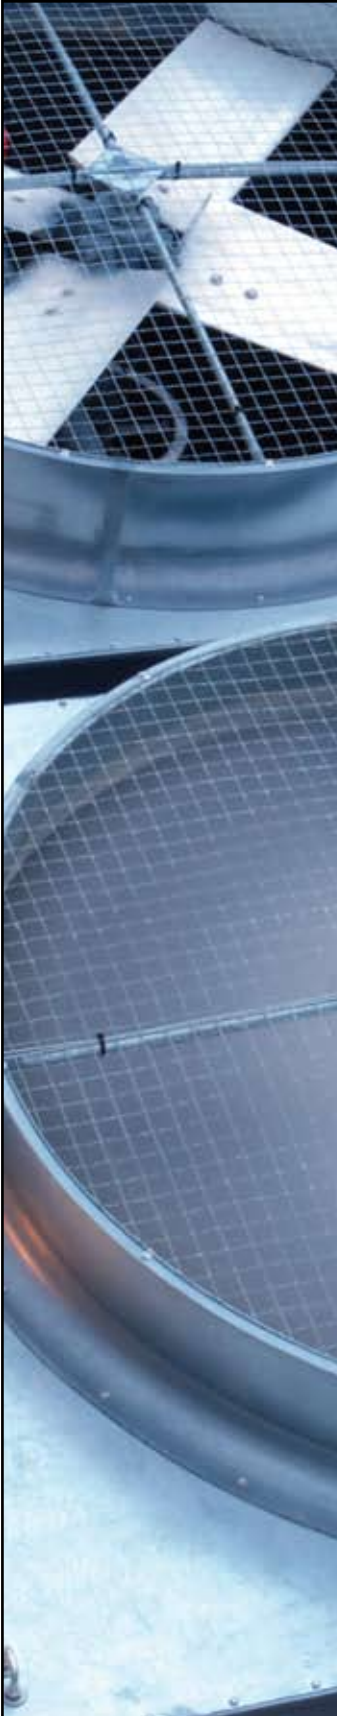

Sensing element design consists of four piezoresistors galvanized with a thin, chemically etched silicon diaphragm that produces a proportional electrical output. Potential applications include dialysis equipment, HVAC devices, data storage, industrial machinery, and more.



| Series | ASDX | XPCL | XPXL |
|------------------------------------|--|--|--|
| Signal conditioning | amplified | unamplified | unamplified |
| Pressure range | ±5 in H ₂ O; ±10 in H ₂ O | 4 in H ₂ O to 10 in H ₂ O | 4 in H ₂ O to 10 in H ₂ O |
| Device type | absolute, differential, bidirectional gage | differential, gage | differential, gage |
| Output | analog (Vdc), digital (I ² C or SPI) | mV | mV |
| Calibrated | yes | yes | no |
| Temperature comp. | yes | yes | no |
| Accuracy | total error band: ±2.0 %FSS max. | linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.5 % typ. |
| Mounting options | DIP | SIP | SIP |
| Operating temperature range | 0 °C to 85 °C [32 °F to 185 °F] (compensated) | 0 °C to 70 °C [32 °F to 158 °F] (compensated) | -25 °C to 85 °C [-13 °F to 185 °F] |
| Measurements (H x W x D) | 16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in] | 20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in] | 20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in] |
| Approvals | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |
| Features | ASIC-enhanced output; analog output with 12-bit resolution or 14-bit digital output; enhanced response time and accuracy | small size; constant voltage excitation; high impedance; low current | small size; constant voltage excitation; high impedance; low current |



| CPCL | CPXL | DCXL-DS | XCAL |
|--|--|--|--|
| unamplified | unamplified | unamplified | amplified |
| 4 in H ₂ O, 10 in H ₂ O | 4 in H ₂ O, 10 in H ₂ O | ±1 in H ₂ O to ±10 in H ₂ O | ±4 in H ₂ O to ±10 in H ₂ O |
| absolute, differential, gage | absolute, differential, gage | differential | differential |
| mV | mV | mV | Vdc |
| yes | no | yes | yes |
| yes | no | yes | yes |
| linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.2 % typ. | – |
| SIP | SIP | SIP | SIP |
| 0 °C to 70 °C [32 °F to 158 °F] (comp.) | -25 °C to 85 °C [-13 °F to 185 °F] | 0 °C to 50 °C [32 °F to 122 °F] | 0 °C to 50 °C [32 °F to 122 °F] (comp.) |
| 20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in] | 20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in] | 27,43 mm x 27,94 mm x 13,21 mm [1.06 in x 1.1 in x 0.52 in] | 27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in] |
| RoHS, WEEE | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |

small size; constant voltage excitement; high impedance, low current; tube arrangements with nylon housings

improved stress isolation; reduced output offset errors

constant voltage excitement; ratiometric output

Silicon Pressure Sensors

Ultra Low Pressure (<1 psi)

Sensing element design consists of four piezoresistors galvanized with a thin, chemically etched silicon diaphragm that produces a proportional electrical output. Potential applications include dialysis equipment, HVAC devices, data storage, industrial machinery, and more.



| Series | XCXL | SCXL |
|-------------------------|--|--|
| Signal cond. | unamplified | unamplified |
| Pressure range | ±4 in H ₂ O to ±10 in H ₂ O | 4 in H ₂ O to 10 in H ₂ O |
| Device type | differential | differential, gage |
| Output | mV | mV |
| Calibrated | yes | yes |
| Temp comp. | yes | yes |
| Accuracy | linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.2 % typ. |
| Mounting | SIP | SIP |
| Operating temp. | 0 °C to 70 °C [32 °F to 158 °F] (comp.) | 0 °C to 50 °C [32 °F to 122 °F] (comp.) |
| Measure. (H x W x D) | 27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in] | 27,43 mm x 27,94 mm x 13,21 mm [1.08 in x 1.1 in x 0.52 in] |
| Approvals | RoHS, WEEE | RoHS, WEEE |
| Features | stress-isolated package; ratiometric output | small size; low noise; high impedance, low current |





| SDX005IND4/SDX010IND4 | SXL | DC | DUXL |
|--|---|---|--|
| unamplified | unamplified | amplified | unamplified |
| ±5 in H ₂ O to ±10 in H ₂ O | ±10 in H ₂ O | 1 in H ₂ O to 10 in H ₂ O | 1 in H ₂ O to 30 in H ₂ O |
| differential, gage | differential, gage | differential, gage | differential, gage |
| mV | mV | Vdc | mV |
| yes | no | yes | yes |
| yes | no | yes | yes |
| linearity & hysteresis: 0.2 % typ. | linearity & hysteresis: 0.2 % typ. | total error band: ±2.0 % | linearity & hysteresis: 0.5 % typ. |
| DIP | DIP | SIP | SIP |
| 0 °C to 50 °C [32 °F to 122 °F] (comp.) | 0 °C to 50 °C [32 °F to 122 °F] | 0 °C to 50 °C [32 °F to 122 °F] (comp.) | -25 °C to 85 °C [-13 °F to 185 °F] (comp.) |
| 9,4 mm x 13,97 mm x 11,94 mm [0.37 in x 0.55 in x 0.47 in] | 9,4 mm x 13,97 mm x 11,94 mm [0.37 in x 0.55 in x 0.47 in] | 27,43 mm x 27,94 mm x 13,21 mm [1.06 in x 1.10 in x 0.52 in] | 7,11 mm x 12,7 mm x 30,48 mm [0.28 in x 0.5 in x 1.20 in] |
| RoHS, WEEE | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |
| solvent-resistant case; low noise; high impedance, low current | enhanced accuracy, low pressure readings; high impedance bridge | ratiometric or regulated voltage output | low profile; small size; ratiometric output |

Silicon Pressure Sensors

Low (1 psi to 15 psi) to Mid (15 psi to 250 psi)



Utilizes a specialized piezoresistive micro-machined sensing element which allows part interchangeability, and enhanced performance, reliability, and accuracy. Potential applications include medical, HVAC, data storage, industrial machinery, pumps, and robotics.



| Series | 24PC | 26PC |
|---------------------------------|--|---|
| Signal conditioning | unamplified | unamplified |
| Pressure range | 0.5 psi to 250 psi (SIP, DIP) 1 psi to 15 psi (SMT) | 1 psi to 250 psi (SIP, DIP) 1 psi to 15 psi (SMT) |
| Device type | absolute, differential, wet-wet differential, gage, vacuum gage | differential, wet-wet differential, gage, vacuum gage |
| Output | mV | mV |
| Calibrated | no | yes |
| Temperature comp. | no | yes |
| Accuracy | linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.5 % typ. |
| Mounting options | DIP, SIP, SMT | DIP, SIP, SMT |
| Operating temp. | -40 °C to 85 °C [-40 °F to 185 °F] | 0 °C to 50 °C [32 °F to 122 °F] (comp.) |
| Measurements (H x W x D) | SIP, DIP: 27,94 mm x 12,7 mm x 16,0 mm [1.10 in x 0.5 in x 0.63 in] SMT: 7,87 mm x 10,41 mm x 10,92 mm [0.31 in x 0.41 in x 0.43 in] | SIP, DIP: 27,94 mm x 12,7 mm x 16,0 mm [1.10 in x 0.5 in x 0.63 in] SMT: 7,87 mm x 10,41 mm x 10,92 mm [0.31 in x 0.41 in x 0.43 in] |
| Approvals | RoHS, WEEE | RoHS, WEEE |
| Features | SIP, DIP: true wet/wet differential sensing; miniature package; operable after exposure to frozen conditions; choice of termination for gage sensors SMT: true wet/wet differential sensing; pick-up feature; maximum peak reflow temperature of 260° [500 °F]; end-point calibration; elastomeric construction | SIP, DIP: true wet/wet differential sensing; miniature package; operable after exposure to frozen conditions; choice of termination for gage sensors SMT: true wet/wet differential sensing; pick-up feature; maximum reflow temperature of 260° [500 °F]; end-point calibration; elastomeric construction |



| CPC | CPX | ASDX | SDX |
|---|---|--|--|
| unamplified | unamplified | amplified | unamplified |
| 1 psi to 150 psi | 1 psi to 150 psi | 1 psi to 100 psi | 1 psi to 100 psi |
| absolute, differential, gage | absolute, differential, gage | absolute, differential, gage, bidirectional | absolute, differential, gage |
| mV | mV | analog (Vdc), digital (I ² C or SPI) | mV |
| yes | no | yes | yes |
| yes | no | yes | yes |
| linearity & hysteresis: 0.5 % typ. | linearity & hysteresis: 0.5 % typ. | total error band: ±2.0 %FSS max. | linearity & hysteresis: 0.25 % typ. |
| SIP | SIP | DIP | DIP |
| 0 °C to 70 °C [32 °F to 158 °F] (comp.) | -25 °C to 85 °C [-12 °F to 185 °F] | 0 °C to 85 °C [32 °F to 185 °F] (comp.) | 0 °C to 50 °C [32 °F to 122 °F] (compensated) |
| 20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in] | 20,1 mm x 9,9 mm x 25,4 mm [0.79 in x 0.39 in x 1.0 in] | 16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in] | 16,6 mm x 13,9 mm x 16,6 mm [0.67 in x 0.55 in x 0.67 in] |
| RoHS, WEEE | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |
| small size; constant voltage excitement; high impedance, low current | small size; constant voltage excitement; high impedance, low current | ASIC-enhanced output; analog or 12-bit digital output | small size; low noise; high impedance; corrosion resistant; available in two grades |

Silicon Pressure Sensors

Low (1 psi to 15 psi) to Mid (15 psi to 250 psi) and Low

Utilizes a specialized piezoresistive micro-machined sensing element which allows part interchangeability, and enhanced performance, reliability, and accuracy. Potential applications include medical, HVAC, data storage, industrial machinery, pumps, and robotics.



| Series | TruStability™ HSC | TruStability™ SSC | SCC |
|---------------------------------|--|--|--|
| Signal conditioning | amplified | amplified | unamplified |
| Pressure range | 1 psi to 150 psi | 1 psi to 150 psi | SIP, DIP: 1 psi to 100 psi SMT: 1 psi to 150 psi |
| Device type | absolute, differential, gage, compound | absolute, differential, gage, compound | absolute, differential, gage |
| Output | analog (Vdc); digital (I ² C or SPI) | analog (Vdc); digital (I ² C or SPI) | mV |
| Calibrated | yes | yes | no |
| Temperature comp. | yes | yes | yes |
| Accuracy | total error band: ±1 %FSS; linearity & hysteresis: ±0.25 %FSS BFSL | total error band: ±2 %FSS; linearity & hysteresis: ±0.25 %FSS BFSL | SIP, DIP: linearity & hysteresis: 0.2 % typ.; SMT: linearity, hysteresis & repeatability: 0.2 % typ. |
| Mounting options | DIP, SIP, SMT | DIP, SIP, SMT | DIP, SIP, SMT |
| Operating temp. | -20 °C to 85 °C [-4 °F to 185 °F] (compensated) | -20 °C to 85 °C [-4 °F to 185 °F] (compensated) | 0 °C to 50 °C [32 °F to 122 °F] (comp.) |
| Measurements (H x W x D) | varies by package style | varies by package style | SIP, DIP: varies by package style SMT: 7,6 mm x 7,6 mm x 8,7 mm [0.3 in x 0.3 in x 0.34 in] |
| Approvals | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |
| Features | industry-leading long-term stability | industry-leading long-term stability | SIP, DIP: reduced cost; small size SMT: high impedance bridge; low power consumption; lidded or ported versions |

Features a sensing technology that utilizes a specialized piezoresistive micro-machined sensing element. Potential uses include measuring vacuum or positive pressure in medical and environmental applications.



| Series | 24PC Flow-Through |
|------------------------------------|--|
| Signal conditioning | unamplified |
| Pressure range | 15 psi to 30 psi |
| Device type | flow-through gage |
| Output | mV |
| Calibrated | no |
| Temperature comp. | no |
| Accuracy | linearity & hysteresis: 0.75 % typ. |
| Mounting options | SIP |
| Operating temperature range | -40 °C to 85 °C [-40 °F to 185 °F] |
| Measurements (H x W x D) | 8,89 mm x 25,65 mm x 12,7 mm [0.35 in x 1.01 in x 0.50 in] |
| Approvals | RoHS, WEEE |
| Features | miniature package; media flow-through port; operable after exposure to frozen conditions; choice of term |



Pressure Flow-Through (1 psi to 100 psi)



| SX | SCX | XPC | XPX |
|--|--|---|---|
| unamplified | unamplified | unamplified | unamplified |
| 1 psi to 150 psi | 1 psi to 150 psi | 1 psi to 150 psi | 1 psi to 150 psi |
| absolute, differential, gage | absolute, differential, gage | absolute, differential, gage | absolute, differential, gage |
| mV | mV | mV | mV |
| no | yes | yes | no |
| no | yes | yes | no |
| SIP, DIP: linearity & hysteresis: 0.2 % typ. SMT: linearity, hysteresis & repeatability: 0.2 % typ. | linearity & hysteresis: 0.3 % typ. | linearity & hysteresis: 1.0 % typ. | linearity & hysteresis: 1.0 % typ. |
| DIP, SIP, SMT | SIP | SIP | SIP |
| SIP, DIP: -40 °C to 85 °C [-40 °F to 185 °F] SMT: -40 °C to 125 °C [-40 °F to 257 °F] | 0 °C to 70 °C [32 °F to 158 °F] (compensated) | 0 °C to 70 °C [32 °F to 158 °F] (compensated) | -25 °C to 85 °C [-13 °F to 185 °F] |
| SIP, DIP: varies by package style SMT: 7,6 mm x 7,6 mm x 8,7 mm [0.3 in x 0.3 in x 0.34 in] | 26,3 mm x 27,9 mm x 27,4 mm [1.03 in x 1.10 in x 1.08 in] | 20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in] | 20,0 mm x 15,2 mm x 5,3 mm [0.8 in x 0.6 in x 0.21 in] |
| RoHS, WEEE | RoHS, WEEE | RoHS, WEEE | RoHS, WEEE |
| SIP, DIP: cost effective; small size; low noise; high impedance bridge SMT: high impedance bridge; low power consumption; lidded or ported versions | small size; low noise; enhanced accuracy; high impedance; corrosion resistant | small size; constant voltage excitation; high impedance; low current | small size; constant voltage excitation; high impedance; low current |



26PC Flow-Through

| |
|--|
| unamplified |
| 1 psi to 100 psi |
| flow-through gage |
| mV |
| yes |
| yes |
| linearity & hysteresis: 0.35 % typ. |
| SIP |
| 0 °C to 50 °C [32 °F to 122 °F] (compensated) |
| 8,89 mm x 25,65 mm x 12,7 mm [0.35 in x 1.01 in x 0.50 in] |
| RoHS, WEEE |

ation for gage sensors

Pressure Sensors

Stainless Steel Media Isolated



Known for enhanced quality, reliability, and durability. Engineered with fully steel media isolating with stainless steel or aerospace alloys and no internal elastomeric seals. Resistant to harsh, aggressive media, and challenging environments. Potential applications include compressors, hydraulic controls, and in industries such as aerospace, medical, transportation, agriculture, refrigeration, and industrial.



| Series | 13mm | 19mm |
|--------------------------------------|--|---|
| Pressure connection | ring with back support, 1/8-27 NPT, 1/4-18 NPT, 7/16 UNF | cell with body o-ring, flush mount, flush mount with flange, 1/8-27 NPT, 1/4-18 NPT, 7/16 UNF, 1/4 BSP, Euro o-ring, 1/4 VCR (female nut) |
| Measurement type | absolute, sealed gage | absolute, gage, vacuum gage |
| Construction | wetted parts 316L SS | wetted parts 316L SS |
| Pressure range | 0 psi to 500 psi through 0 psi to 5000 psi | 0 psi to 3 psi through 0 psi to 500 psi |
| Output signal | 0 mV to 100 mV (nominal) | 0 mV to 150 mV (nominal) |
| Accuracy | ±0.25 % BFSL max. | ±0.25 % BFSL max. |
| Amplified | no | no |
| Compensated temperature range | 0 °C to 82 °C [32 °F to 180 °F] | 0 °C to 82 °C [32 °F to 180 °F] |
| Termination | ribbon cable | ribbon cable |
| Measurements (H x W x D) | varies by body type | varies by body type |
| Approvals | — | — |
| Features | isolated stainless steel package; voltage or current supply options; accommodates media that will not adversely affect 316SS | isolated stainless steel package; vacuum compatible; accommodates media that will not adversely affect 316SS |



MLH

1/4-18 NPT; M12 x 1.5 (ISO 6149); M14 x 1.5 (ISO 6149);
 3/8-24 UNF (SAE-3 o-ring boss); M18 x 1.5 (ISO 6149);
 1/8 in-27 NPT; 1/2 in-20 UNF (SAE-5 o-ring boss);
 M10 x 1 (ISO 6149); 1/4 in SAE female Schrader; 7/16-20 UNF (SAE-4 o-ring boss);
 1/2 in NPT; 9/16-18 UNF (SAE-6 o-ring boss); PT 1/4-19 BSP tapered thread;
 G 1/4-19 (DIN 3852-2); G 1/8 with o-ring groove; M16 x 1.5 (ISO 6149);
 G 1/4 with o-ring groove; G 1/8 (DIN 3852-2); PT 1/8-28 BSP tapered thread;
 M20 x 1.5 (ISO 6149); 1/2-20 37° Flare (SAE JIC)

gage, sealed gage

port - 304L stainless steel; diaphragm - Haynes 214 alloy

0 psi to 50 psi through 0 psi to 8000 psi

0.5 Vdc to 4.5 Vdc ratiometric output at 5 Vdc excitation;
 4 mA to 20 mA current from 9.5 Vdc to 30 Vdc excitation;
 1.0 Vdc to 6.0 Vdc regulated output from 8 Vdc to 30 Vdc excitation;
 0.25 Vdc to 10.25 Vdc regulated output from 14 Vdc to 30 Vdc excitation;
 0.5 Vdc to 4.5 Vdc regulated output from 7 Vdc to 30 Vdc excitation;
 0 mV to 50 mV from 5 Vdc excitation;
 1 Vdc to 5 Vdc output from 8 Vdc to 30 Vdc excitation

±0.25 % full scale BFSL
 (±0.5 % full scale BFSL on ranges below 100 psi)

yes

-40 °C to 125 °C [-40 °F to 257 °F]

Packard MetriPak 150; Hirschmann; M12 x 1 (Brad Harrison micro); DIN 72585 (Cannon APD type); DIN 43650-C (IP65); Amp Superseal 1.5 (IP67); cable; flying leads; Deutsch DTM04-3P (integral)

27,0 mm x 27,0 mm x 55 mm [1.06 in x 1.06 in x 2.18 in]

UL, CE (for most models, excludes 0 mV to 50 mV)

all-wetted parts; no internal elastomeric seals; stable and creep-free; reverse voltage and output short circuit protected; less than 2 ms response time; easy customization; exceeds CE heavy industrial EMC for use in areas of high RFI/EMI



SPT

1/8-27 NPT, 1/4-18 NPT, 7/16-20 UNF,
 1/4-19 BSPP, 1/4 VCR gland

absolute, gage, sealed gage,
 vacuum gage pressures

wetted parts 316L SS

0 psi to 3 psi through 0 psi to 5000 psi

4 mA to 20 mA, 0 mV to 100 mV,
 1 Vdc to 5 Vdc

±0.25 % BFSL max.

yes, amplified and unamplified

-10 °C to 85 °C [14 °F to 185 °F]

bayonet connector, cable

22,2 mm x 22,2 mm x length varies
 [0.875 in x 0.875 in x length varies]

—

calibrated and temperature compensated; NEMA 4 design; rugged 316 stainless steel wetted parts

As one of the world's leading providers of sensors and switches, Honeywell understands and meets the requirements of a wide variety of industries.



Honeywell Sensing and Control is a global leader in providing reliable, cost-effective sensing and switching solutions for our customers' applications. We serve thousands of customers in four core industry segments: industrial, medical equipment, transportation, and aerospace/military products.

Aerospace

Aerospace applications are among the most demanding for any type of product. Rigorous FAA requirements, extreme environments (temperature, shock, vibration, the need for hermetic sealing), and the ability to customize devices are just a few of the parameters often required of sensors and switches in these applications. Aerospace customers typically value speed in prototyping and development, and Honeywell's vertically integrated, AS9100-approved manufacturing locations enhance our ability to produce devices in a wide variety of packages. The precision output of our products helps reduce risk and cost in key applications while also minimizing the need for unscheduled maintenance.

Honeywell's in-depth aerospace engineering experience allows us to work with customers in the design and development of

products that best meet the specified requirements of their individual applications. Making products simple to install makes the job easier every step of the way. And, the odds are that Honeywell is already on the list of trusted suppliers for many aerospace companies, underscoring the decades of experience we bring to this field.

Honeywell products for this industry (many of them PMA-certified) include force sensors, load cells, potentiometers, pilot controls, pressure sensors, pressure switches, resolvers, sensor/actuator assemblies for systems ranging from aerostructures to fuel control to flight surfaces, speed sensors, temperature probes, thermostats, torque sensors, y-guides for cargo systems, MICRO SWITCH™ sealed and high-accuracy switches, MICRO SWITCH™ pushbutton switches, and MICRO SWITCH™ rocker and toggle switches.

Medical

Medical applications typically require sensors and switches that are highly stable and extremely reliable to enhance patient safety and comfort. Stability is often essential to minimize long term drift, reduce the need for recalibration, and improve ease of use for medical equipment operators. Reliability enhances patient safety in life-critical applications, reduces downtime, and improves test throughput in applications such as clinical diagnostics. The product needs to be easy to use and easy to design into a system, so Honeywell's extensive customization and built-in calibration/amplification capabilities are strong benefits. Confidence in Honeywell's product performance, reliability, and availability provide peace of mind for medical equipment manufacturers who choose Honeywell.

Honeywell offerings for this industry include airflow sensors, silicon and stainless steel media isolated pressure sensors, Hall-effect magnetic position sensors, humidity sensors, flexible heaters, force sensors, thermostats, commercial solid state sensors, infrared sensors, oxygen sensors, pressure and vacuum switches, potentiometers and encoders, MICRO SWITCH™ pushbutton, rocker, and toggle switches, and hour meters.

Industrial

The industrial arena can be a rough one. From high-speed food processing to high-force stamping applications, reliable and cost-effective sensors and switches often help minimize repair costs, maximize system life, and reduce overall system expense. Durability can mean the difference between smooth-running processes and expensive downtime. Accurate, repeatable sensor or switch output can reduce the need for calibration once the device is applied. Because of the wide variety of potential applications, Honeywell's ability to deliver a customized product that can meet virtually any size, weight, and power requirement – as well as any packaging stipulations for tough, harsh environments – often makes it easy to incorporate and use our

devices. Safety is another important consideration for industrial users, and our products meet a wide variety of regulatory safety requirements.

Honeywell's industrial product line includes airflow sensors, current sensors, humidity sensors, fiber-optic and liquid-level sensors, linear position sensors, oxygen sensors, pressure sensors, potentiometers and encoders, speed sensors, temperature probes, ultrasonic sensors, wirewound resistors, thermostats, commercial solid state sensors, flex heaters, SMART position sensors, silicon and stainless steel media isolated pressure sensors, force sensors, safety light curtains, push-pull switches, and MICRO SWITCH™ basic switches, hazardous area switches, safety switches, key and rotary switches, limit switches, sealed and high-accuracy switches, pushbutton, rocker, toggle switches, and relays.

Transportation

Getting from Point A to Point B is often challenging for end-customers of transportation providers – Honeywell aims to make the trip easier with highly reliable, cost-effective switches and sensors. Our products are designed to support rigorous engine requirements, and their efficiency can also help optimize engine performance. Customization is often required to allow a switch or sensor to be mounted in tight or challenging environments including vibration, temperature extremes, and road contamination. The durability of Honeywell products enhances system reliability, which is also boosted by the stable, accurate output of our devices. All of these capabilities allow demanding customers to rely on Honeywell's many years of experience in the transportation industry.

Honeywell products for transportation applications include Hall-effect rotary position sensors, inertial measurement units, infrared sensors, keyless entry sensors, magnetic position sensors, pressure sensors, speed and direction sensors, ultrasonic sensors, thermostats, temperature probes, commercial solid state sensors, SMART position sensors, and MICRO SWITCH™ pushbutton, rocker, and toggle switches.



Sensing and Control Product Portfolio

Product reliability. Industry knowledge. Expertise. Standard with every order.

With more than 50,000 sensing, switching, and control products ranging from snap-action, limit, toggle, and pressure switches to position, speed, pressure, and airflow sensors, Honeywell Sensing and Control has one of the broadest sensing and switching portfolios available.

SENSORS



Airflow sensors: Advanced microstructure technology. Sensitive and fast response to flow, amount/direction of air or other gas. Proportional output voltage. Thin-film, thermally isolated bridge structure consists of a heater and temperature sensing elements. **May be used in:** HVAC, respirators, process control, oxygen concentrators, gas metering, chromatography, leak detection equipment, medical/analytical instrumentation, and ventilation equipment.



Current sensors: Accurate and fast response. Almost no thermal drift or offset with temperature. Adjustable linear, null balance, digital, and linear current sensors. **May be used in:** Variable speed drives, overcurrent protection, power supplies, ground fault detectors, robotics, industrial process control, and wattmeters.



Flexible heaters: Flat, molded-to-shape, spiral wrap, transparent, composite, and high temperature configurations with single, multiple, and variable watt densities. Can be bonded parts or combined. **May be used in:** Airborne valves, outdoor cameras, LCD displays, scanners, and telecommunication.



Force sensors: Variety of package styles and various electrical interconnects including pre-wired connectors, printed circuit board mounting, and surface mounting for flexibility. **May be used in:** Infusion and syringe pumps, blood pressure equipment, pump pressure, drug delivery systems, occlusion detection, and kidney dialysis machines.



Humidity sensors: Configured with integrated circuitry. Provide on-chip signal conditioning with interchangeability of $\pm 3\%$ accuracy and out-of-the-box reliability. Standardized, platform-based sensors. **May be used in:** Air compressors, food and beverage packaging and processing, HVAC, printing presses, and office equipment.



Infrared sensors: IREDS, sensors, and assemblies for object presence, limit and motion sensing, position encoding, and movement encoding. Variety of package styles, materials, and terminations. **May be used in:** Printers/copiers, motion control systems, metering, data storage systems, scanning, automated transaction, drop sensors, and non-invasive medical equipment.



Magnetic sensors: Digital and analog Hall-effect position, magnetoresistive, Hall-effect vane, gear-tooth, and magnetic sensors. **May be used in:** Speed and RPM sensing, motor/fan control, magnetic encoding, disc speed, tape, flow-rate sensing, conveyors, ignitions, motion control/detection, power/position, magnetic code reading, vibration, and weight sensing.



Position sensors: SMART position sensor: Superior Measurement, Accuracy, Reliability, and Thinking. The most accurate linear position sensor available in the industry (0.05 mm [0.002 in]), enabling highly accurate motion control, and improving efficiency and safety. Non-contact design eliminates mechanical failure mechanisms, reducing wear and tear, improving reliability and durability, and minimizing downtime. Robustness in most harsh environments. Easy to install, reducing set-up costs. Potentiometric sensors withstand harsh chemicals and immersion into oils or water. Extended life PTFE bearings, precious metal multi-finger contact wipers, and MYSTR® conductive plastic thick-film elements. Analog output correlated to location. **May be used in:** Injection molding, printing presses, cylinder positioning, gauges, controls, aircraft, elevators, material handling, packaging, molding, valves, wafer handling, and woodworking machinery.



Pressure sensors - silicon: Full line of industrial-grade sensors: media-isolating design, multiple ports and outlets, and electrical configurations. **May be used in:** Pneumatic controls, air compressors, process monitoring, hydraulic controls, VAV controls, clogged filter detection, presence/absence of flow, transmissions, and refrigeration.



Pressure sensors - stainless steel media isolated: Bonded strain gage technology. Very resistant to effects of shock, vibration, and hostile environments. **May be used in:** HVAC, hydraulic controls, suspensions, agricultural equipment, engines, compressors, robotics, industrial and automotive systems, pressure transmitters, process controls, and medical diagnostics.



Proximity sensors: Designed to meet demanding temperature, vibration, shock, and EMI/EMP interference requirements. Number of housing materials and termination styles. **May be used in:** Aircraft landing gear, gun turret position control, and door and hatch open/closed monitoring.



Rotary position sensors: Digital and analog Hall-effect, magnetoresistive, and potentiometric devices for sensing presence of a magnetic field or rotary position. Directly compatible with other electronic circuits for application flexibility. **May be used in:** Audio and lighting, frequency, temperature, position, time, medical/instrumentation, computer peripherals, manual controls, joysticks, telecommunication, welding, heating, and aerospace.



Speed sensors: Measure speed, position, and presence detection utilizing magnetoresistive, variable reluctance, Hall-effect, variable inductance, and Spiral technologies. **May be used in:** Cam and crankshafts, transmissions, fans, pumps, mixers, rollers, compressors, industrial process control, engines/motors, wheels, and tachometers.



Temperature sensors: Customized probes, thermistors, and RTD sensors. Plastic/ceramic, miniaturized, surface-mount housings, and printed circuit board terminations. **May be used in:** Semi-conductor protection, vending machines, power generation, hydraulic systems, thermal management, and temperature compensation.



Thermostats: Commercial and precision snap-action. Automatic or manual reset options, phenolic or ceramic housings. **May be used in:** Telecommunications, battery heater controls, computers, copy machines, fax machines, food service, food carts, small and major appliances, heat and smoke detectors, and HVAC equipment.



MICRO SWITCH™ pushbutton switches: Lighted or unlighted. Wide range of electrical and display design, pushbuttons, and manual switches. Many shapes, sizes, and configurations. Easy to apply, operate, and maintain. **May be used in:** Control boards and panels, industrial and test equipment, computers, medical instrumentation, and aerospace.



MICRO SWITCH™ rocker switches: Wide range of electrical and display design. Many shapes, sizes, and configurations to enhance manual operation. **May be used in:** Transportation, agricultural and construction equipment, test equipment, heavy-duty machinery, marine equipment, small appliances, telecom, medical instrumentation, and commercial aviation.



MICRO SWITCH™ toggle switches: Wide range of electrical and display design. Available in many shapes, sizes, and configurations. **May be used in:** Aerial lifts, construction equipment, agriculture and material-handling equipment, factory-floor controls, process control, medical instrumentation, test instruments, and military/commercial aviation.



MICRO SWITCH™ aerospace-grade pressure switches: lightweight, compact pressure switches sense changes in gas/pressure. Qualified to MIL-PFR-8805 and its lower operating force provides application versatility with enhanced precision. Design modularity allows for configuration of the switch, facilitating rapid customization to the precise, demanding requirements. **May be used in:** aerospace systems -including engines, fuel pressure, and hydraulic systems, military ground vehicles, ordnance and munitions release systems, military maritime systems.



Pressure and vacuum switches: Feature set points from 0.5 psi to 3000 psi. Rugged components have enhanced repeatability, flexibility, and wide media capability. **May be used in:** Transmissions, hydraulics, brakes, steering, generators/compressors, dental air, embalming equipment, oxygen concentrators, air cleaners, fuel filters, and pool water pressure.

ELECTROMECHANICAL SWITCHES



MICRO SWITCH™ basic switches: Snap-action precision switches. Compact. Lightweight. Designed for repeatability and enhanced life. Premium and standard basic switches: standard, miniature, subminiature, hermetically sealed, and high-temperature versions. **May be used in:** Vending machines, communication equipment, HVAC, appliances, electronic gaming machinery, valve controls, irrigation systems, foot switches, pressure, and temperature controls.



MICRO SWITCH™ hazardous area switches: Flame path designed to contain and cool escaping hot gases that could cause an explosion. MICRO SWITCH™ EX, BX, CX, and LSX Series. **May be used in:** Grain elevators and conveyors, off-shore drilling, petrochemical, waste-treatment plants, control valves, paint booths, and hazardous waste handling facilities.



Key and rotary switches: Used on machinery in harsh environments. O-rings help keep dirt and moisture out and prolong life. **May be used in:** All-terrain vehicles, golf carts, snowmobiles, scissor lifts, telehandlers, construction and marine equipment, skid loaders, agricultural equipment, material handlers.



MICRO SWITCH™ limit switches: Broadest and deepest limit switch portfolio. Rugged, dependable position detection solutions. MICRO SWITCH™ heavy-duty limit switches (HDLS) and global limit switches. Hermetically and environmentally sealed switches. **May be used in:** Machine tools, woodworking, textile, and printing machinery, metal fabrication, balers/compactors, forklifts, bridges, robotics, wind turbines, elevators, moving stairs, doors, dock locks/levelers, aerial lifts, cranes, conveyors, rail, shipboards, and dock side.



MICRO SWITCH™ sealed and high accuracy switches: Precision 'snap action' mechanisms. Wide variety of actuators, terminations, circuitry configurations, electrical ratings, contact materials, and operating characteristics. **May be used in:** Landing gear, flap/stabilizer controls, thrust reversers, space vehicles, armored personnel carriers, de-icer controls, wingfold actuators, industrial environments, valves, and underwater.

SAFETY PRODUCTS



MICRO SWITCH™ safety switches: For operator point-of-operation protection, access detection, presence sensing, gate monitoring, and electrical interfacing. High-quality, dependable, cost-effective solutions. **May be used in:** Packaging and semi-conductor equipment, plastic-molding machinery, machine tools, textile machines, lifts, industrial doors, balers, compactors, aircraft bridges, telescopic handlers, refuse vehicles.



Safety light curtains: Different resolutions permit detection of an approaching finger, hand, limb, or body. Separate or self-contained control units, various housing sizes, resolutions, scanning ranges, and protection heights. **May be used in:** Point-of-operation protection, access detection, presence sensing, gate monitoring, electrical-to-machine-circuitry interfacing, emergency stop circuits on machines, sliding door protection, conveyors, and transfer lines.

Warranty/Remedy

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

Find out more

To learn more about Honeywell's sensing and control products, call **+1-815-235-6847**, email inquiries to **info.sc@honeywell.com**, or visit **www.honeywell.com/sensing**

Honeywell Sensing and Control

1985 Douglas Drive North
Golden Valley, MN 55422
www.honeywell.com

008081-5-EN IL50 GLO
February 2010
© 2010 Honeywell International Inc. All rights reserved.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this literature is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

For products not designed for safety applications:

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

For products designed for safety applications:

WARNING

RISK TO LIFE OR PROPERTY

Never use this product for an application involving serious risk to life or property without ensuring that the system as a whole has been designed to address the risks, and that this product is properly rated and installed for the intended use within the overall system.

Failure to comply with these instructions could result in death or serious injury.

Honeywell