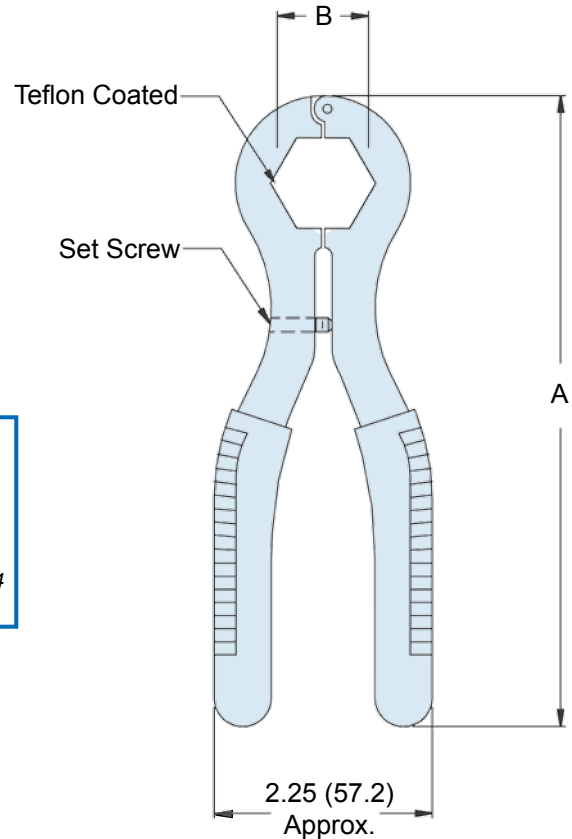
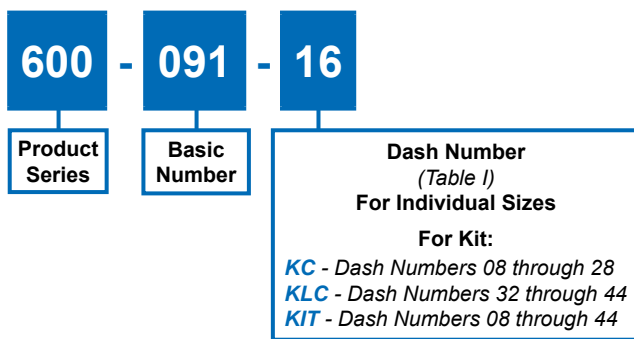


ALUMINUM TOOL FOR USE WITH GLENAIR COMPOSITE BACKSHELLS

TABLE I: DASH NUMBER AND DIMENSIONS

| Dash No. | A Ref. | B +/- .005 (.13) Hex* | Shell Size Ref. | Composite Torque Inch Pounds |
|----------|---------------|-----------------------|-----------------|------------------------------|
| 08 | 7.38 (187.5) | .750 (19.1) | 08/09 | 40 |
| 10 | 7.50 (190.5) | .875 (22.2) | 10/11 | 40 |
| 12 | 7.50 (190.5) | 1.000 (25.4) | 12/13 | 40 |
| 14 | 7.50 (190.5) | 1.125 (28.6) | 14/15 | 40 |
| 16 | 7.50 (190.5) | 1.250 (31.8) | 16/17 | 40 |
| 18 | 7.75 (196.9) | 1.375 (34.9) | 18/19 | 40 |
| 20 | 8.00 (203.2) | 1.500 (38.1) | 20/21 | 80 |
| 22 | 8.25 (209.6) | 1.625 (41.3) | 22/23 | 80 |
| 24 | 8.25 (209.6) | 1.750 (44.5) | 24/25 | 80 |
| 28 | 8.50 (215.9) | 2.000 (50.8) | 28 | 120 |
| 32 | 10.00 (254.0) | 2.250 (57.2) | 32 | 120 |
| 36 | 10.00 (254.0) | 2.500 (63.5) | 36 | 120 |
| 44 | 10.00 (254.0) | 3.000 (76.2) | 44 | 160 |

* See Note 3

APPLICATION NOTES

1. This backshell assembly tool is designed for Glenair composite hex coupling applications and should be used in conjunction with Glenair torque wrenches (see page 14).
2. These wrenches are made of aluminum alloy with vinyl grips.
3. B Hex is critical, adjust set screw until dimension is within tolerance (+/- .005)
4. Metric dimensions (mm) are indicated in parentheses.