

Conduction Cooled Assemblies

CONNECT AND PROTECT

nVent SCHROFF Conduction Cooled Assemblies (CCA's) consist of a conduction cooled frame, feature Calmark Card-Loks, extractors and conduction cooled keys. They are designed for circuit boards requiring cooling in severe environments where convection cooling cannot be used. The assembly also provides needed structural support of the plug-in module in high shock and vibration environments.

NVENT SCHROFF CONDUCTION COOLED ASSEMBLY BENEFITS:

- Downloadable standards compliant CAD templates for easy modification
 - Includes peripheral components such as Card Loks and extractors
 - 3U and 6U templates available for Vita 46, Vita 48.2, VME, and CPCI
- Save time and sourcing costs by managing the entire assembly with one part number
 - ESD protected packaging available
 - Kits can also include thermal pads, EMC gaskets, and labeling per customer requirements
- High performance options with High Clamp Force Card-Loks and tolerance compensating extractors
- Overcome design and thermal challenges by working with in-house engineering team
- Manufactured in an AS9100 compliant facility




THREE STEP DESIGN PROCESS:

- 1 Leverage nVent SCHROFF full design services or download standards compliant, pre-configured CAD template.



- 2 Modify based on board layout and cooling needs.

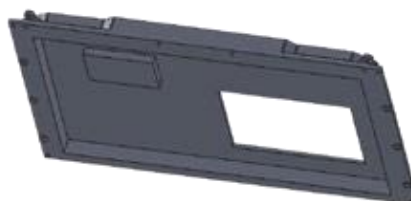

- 3 Order and manage CCA assembly using one part number. CCA assembly may include:
 - Heat frame and clam shell
 - Card-Loks
 - Extractors
 - ESD packaging
 - Thermal pads
 - EMC Gaskets

OPTIONS TO INCREASE PERFORMANCE:




Improve clamp force by 3X with small profile, High Clamp Force Card-Loks



Maintain positive pressure on connectors during Card-Lok actuation with tolerance compensating extractors. Ideal for 2nd level maintenance and can be operated with a gloved hand

NVENT SCHROFF CONDUCTION COOLED ASSEMBLY BENEFITS:

- Collaborate with our experts to perform thermal analysis using software such as 6Sigma and overcome cooling challenges
- Partner with our experienced engineering team to ensure your design is compliant with required standards
- Accelerate your design process with 3D printed CCA's and frames for fit checks

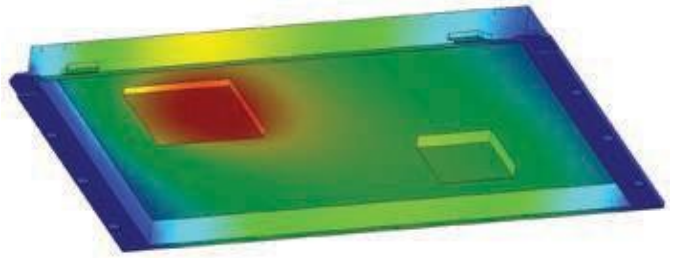

KEY CONDUCTION COOLED ASSEMBLY FEATURES:

- Manufactured in an AS9100 compliant facility
- Conduction frames available in 3U or 6U
- Available in black anodize, chem film, or electroless nickel plating for excellent corrosion resistance
- 6061-T651 aluminum provides high thermal conductivity as well as lightweight support
- Threaded inserts secure board fasteners in extreme vibration environments
- High Clamp force Card-Loks provide high clamping force (up to 3X the clamping force of similarly sized Card-Loks) with even pressure distribution for low thermal resistance
- Frame and backing plate are each machined from a solid piece to assure high heat transfer and robust structural integrity
- Silkscreen available
- ESD packaging enables kit to be pulled from inventory and brought directly to work environment for assembly without concerns of static electricity generation
- All components needed for assembly can be included in the kit bagged and tagged per customer requirements

nVent SCHROFF, Inc.

7328 Trade Street
San Diego, CA 92121 USA
+1 800-525-4682



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER

©2021 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.

SCHROFF-SLSH-H84105-CCA-EN-2104

nVent.com/SCHROFF | 2



www.powell.com
schroffinfo@powell.com
800-235-7880