


<b>DATA SHEET</b> DS/233	<b>PRINT SYSTEM</b> <b>TAGS FOR SI2KPRINT1 THERMAL TRANSFER PRINTER</b>	DATA 23/03/09
-----------------------------	--	------------------

**GRAPHIC REPRESENTATION**

**IN THE PICTURE AN EXAMPLE OF THE SI2K... ITEM**

**TAG'S DETAIL**

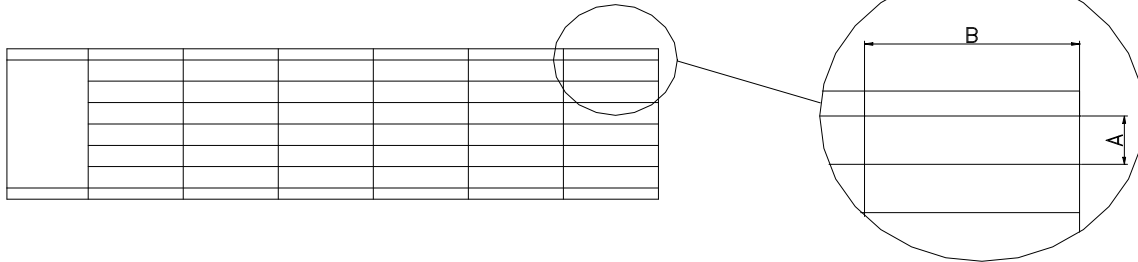

**REFERENCE ITEM CODE**

SI2K0920W - SI2K0920Y - SI2K1001W - SI2K1001Y - SI2K0935W - SI2K0935Y - SI2K1517M - SI2K1517W - SI2K1517Y  
 SI2K40720W - SI2K40720Y - SI2K40920W - SI2K40920Y - SI2K40935W - SI2K40935Y - SI2K41517M - SI2K41517W  
 SI2K41517Y - SI2K40817W - SI2K40817Y - SI2K0730W - SI2K0730Y - SI2K40917W - SI2K40917Y

APPLICATION	SERIES PROPERTIES
Punched tags to mark with the thermal transfer printer SI2KPRINT1	SI2K...M - SI2K...M : silver color SI2K...W - SI2K...W : white color SI2K...Y - SI2K...Y : yellow color

PHYSICAL PROPERTIES	ITEM SI2K.. (NOT SELF-ADHESIVE)	ITEM SI2K4.. (SELF-ADHESIVE)
MATERIAL	PVC - Integral Polyvinyl chloride	PVC - Integral Polyvinyl chloride
COLOR	Metal - White - Yellow	Metal - White - Yellow
SELF-EXTINGUISHABILITY	V0 Class in compliance with UL 94 norms	V0 Class in compliance with UL 94 norms
WATER ABSORPTION	0.08 % after 7 days	0.08 % after 7 days
ADHESIVE MASS	/	ACRYLIC
ADHESION TO STEEL (N/100 mm)	/	72
OPERATIVE TEMPERATURE	-40 ÷ +60 °C (-40 ÷ +140 °F)	-40 ÷ +60 °C (-40 ÷ +120 °C for ADHESIVE)
APPLICATION TEMPERATURE	/	+ 10 °C
PVC / ADHESIVE THICKNESS	0,5 mm / NO	0,5 mm / 0,06 mm.

ITEM CODE	SIZES				QUANTITY			COMPATIBILITY
	A (mm)	B (mm)	SHEET LENGTH (mm)	SHEET WIDTH (mm)	TAGS x PACK	SHEET x PACK	TAGS x SHEET	
SI2K0730W/Y	7	30	220	62	1680	40	42	
SI2K0746W	7	46	230	56	1120	40	28	WAGO I/O 750
SI2K0920W/Y	9	20	240	62	2400	40	60	160..... - 161....
SI2K1001W/Y	9.3	20	240	62	2400	40	60	SI1001
SI2K0935W/Y	9	35	240	62	1440	40	36	160..... - 161....
SI2K1517M/W/Y	15	17	240	62	1560	40	39	SITOB15
SI2K40720W/Y	7	20	240	62	1750	25	70	/
SI2K40817W/Y	8	17	240	62	1925	25	77	/
SI2K40917W/Y	9	17	240	62	1800	25	72	160..... - 161....
SI2K40920W/Y	9	20	240	62	1500	25	60	/
SI2K40935W/Y	9	35	240	62	900	25	36	/
SI2K41517M/W/Y	15	17	240	62	975	25	39	/

**NOTES:** THE ITEMS SI2K40720W - SI2K40720Y CAN MARK THE SIEMENS SERIUS 3R CONTACTORS.  
 ITEM SI2K40817W- Y MAY BE USED TO MARK TESYS TELEMECANIQUE CONTACTORS.

Document	REVIEWED, APPR. BY:	DATE:	REVISION OBJECT	PAGES:
78-8127-9060-4				1 of 1