


ELECTRICAL SPECIFICATIONS

FREQUENCY (GHz): DC - 2.0
POWER RATING: AVG: 5 WATT
 PEAK: 1 KWATTS
VSWR: SEE TABLE

MECHANICAL SPECIFICATIONS

CONNECTORS: N-MALE, BRASS, ALBALOY PLATE
CONNECTOR PINS: BRASS, GOLD PLATE
HOUSING: BRASS, ALBALOY PLATE
INSULATORS: PTFE, VIRGIN ELECTRICAL GRADE
WEIGHT: 2.22 oz

PART NO.	IMPEDANCE (Ohms)	VSWR
400-0.00	SHORT	INFINITE
400-1.00	50.0	1.00:1 ± .10
400-1.25	40.0	1.25:1 ± .10
400-1.50	33.3	1.50:1 ± .10
400-1.75	28.6	1.75:1 ± .15
400-2.00	25.0	2.00:1 ± .25
400-3.50	14.3	3.50:1 ± .30
400-9.99	OPEN	INFINITE

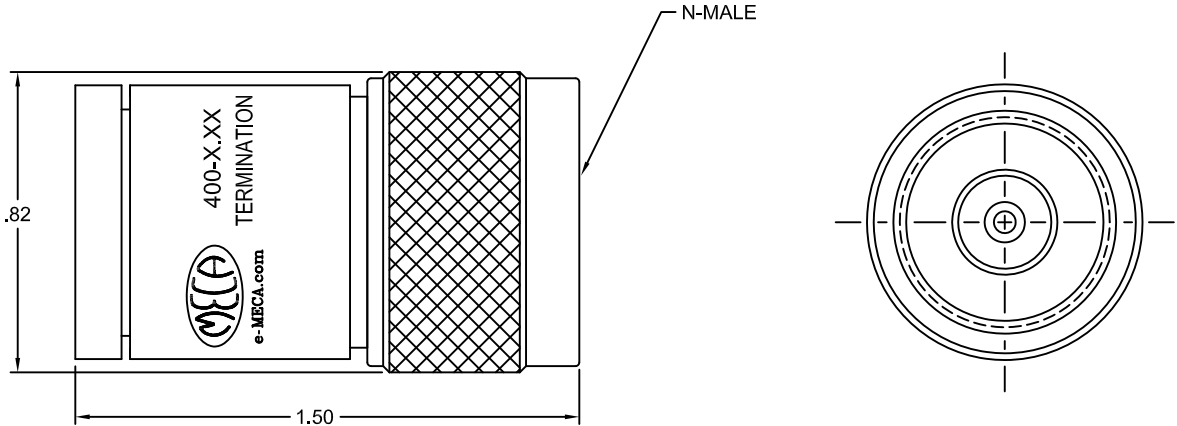

C		SEE DCN #100504-1	05/04/10	DB	RR	FINISH:		TOLERANCES		TITLE TERMINATION, 5 WATT, N-MALE, MISMATCH				
	SEE ABOVE					2 PLACES: ±.02 3 PLACES: N/A ANGLES: N/A								
	DRAWN: NL					DATE: 10/08/04		TIR: N/A						
B		SEE DCN #061912-1	05/12/06	NL	RR	APPROVED: EMM		DATE: 10/25/04		SCALE: NTS	SIZE	CODE IDENT. NO.	DRAWING NO.	REV
LTR	PG	DESCRIPTION	DATE	DR	APP					SHEET: 1 OF 1	A	22424	400 - X.XX	C