



LOC		DIST		REVISIONS			
HM		00		REV	DESCRIPTION	DATE	DWN
				A	NSD07-092	08JAN2008	JM
				B	ECO-08-003895	18FEB2008	JM
				C	REV: ECO-09-001445	27JAN2009	GG
				D	REV: ECO-09-013848	11JUN2009	GG

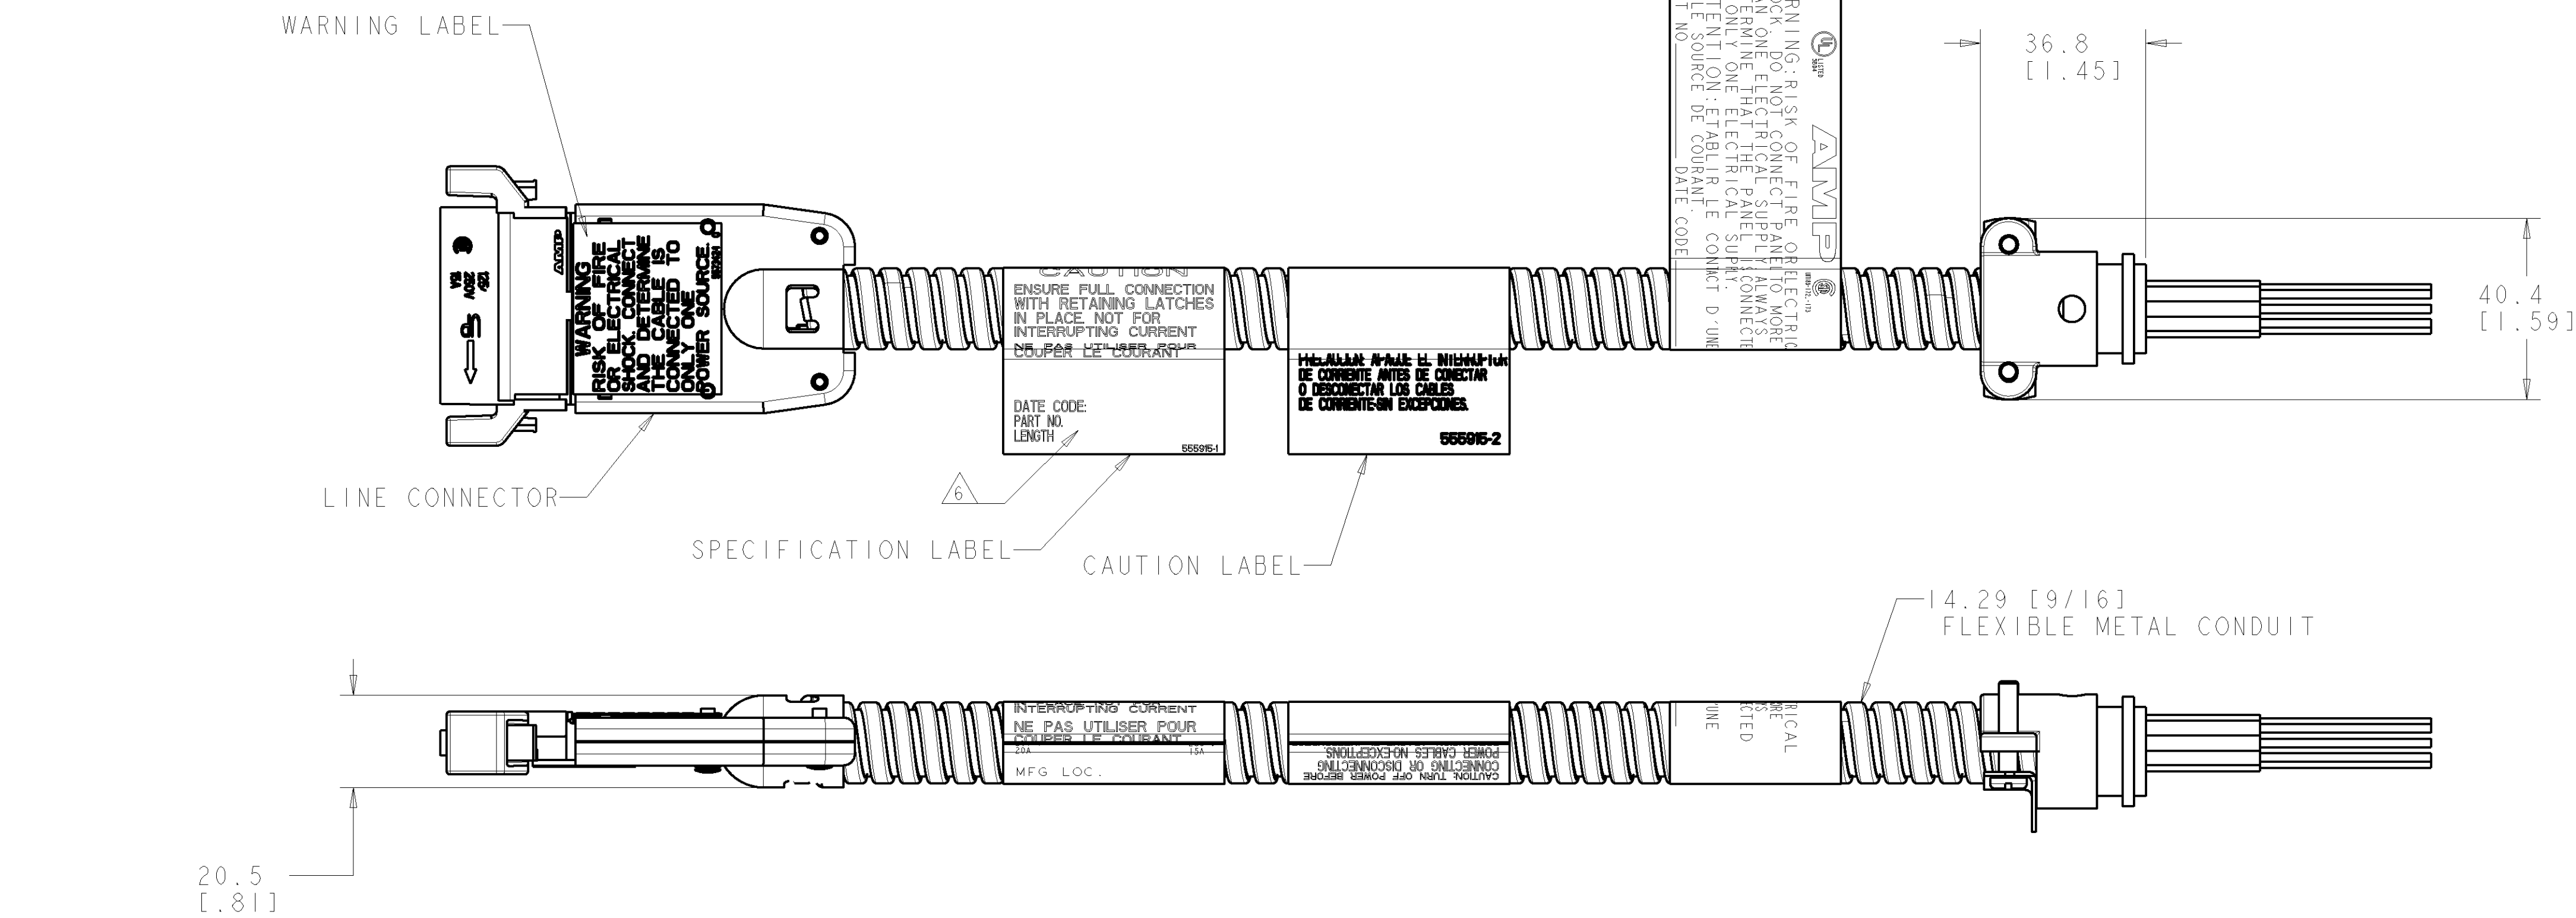

1. DIMENSIONS SHOWN ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
2. CABLE ASSEMBLY IS WIRED PER WIRING DIAGRAM.
3. MATERIAL:
- CONNECTOR HOUSINGS- POLYCARBONATE, UL 94V-0 RATED, NEMA GRAY.
- STRAIN RELIEFS- CARBON STEEL WITH NICKEL PLATING 5.08µm [.000200] MINIMUM THICK.
- CONTACTS- COPPER ALLOY WITH SILVER PLATED STRIP 3.81µm [.000150] MINIMUM THICK.
4. DIMENSION A SHALL BE MEASURED WITH CONDUIT IN THE RELAXED POSITION.
5. DESIGNATIONS IN PARENTHESES () ARE FOR REFERENCE ONLY.
6. MANUFACTURING LOCATION, DATE CODE, PART NUMBER AND LENGTH SHALL BE INK STAMPED APPROXIMATELY WHERE INDICATED
7. APPLICATION: AMPINERGY (TM) - MODULAR POWER DISTRIBUTION SYSTEM, A MANUFACTURED WIRING SYSTEM.
8. CABLE CONNECTOR MATES WITH DEDICATED NEUTRAL (3-3-2) POWER CONNECTOR CABLE ASSEMBLIES. KEYING FEATURE MAINTAINS CORRECT POLARITY OF MATING POWER CONNECTORS.
9. TABS FOR POSITIVE LATCHING TO MATING COMPONENTS.
10. USE GROUND WIRE INSPECTION WINDOW TO VERIFY BONDING AND GROUNDING CONDUCTOR.

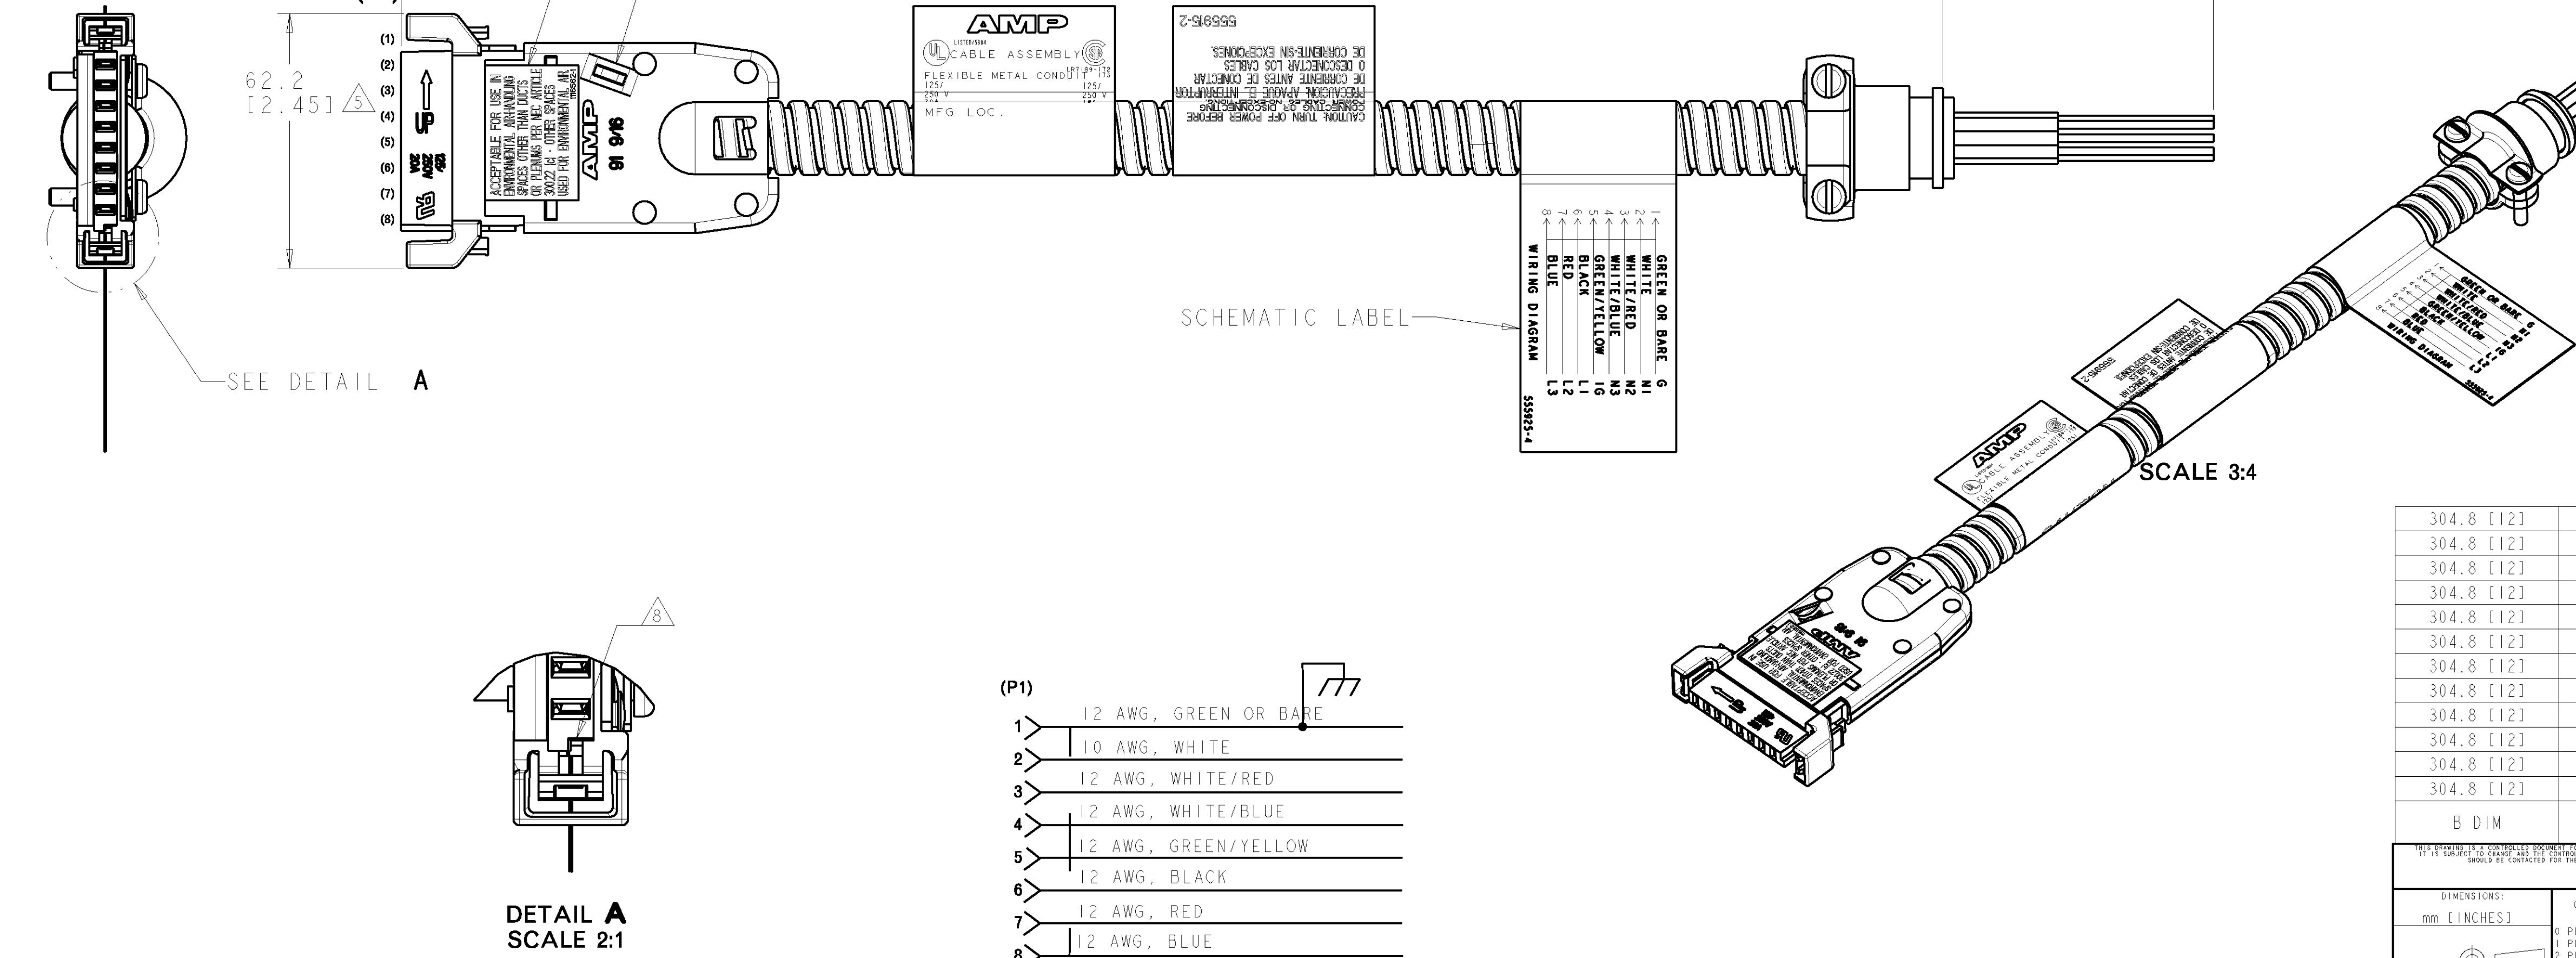

304.8 [12]	15240.0-15316.2 [600.00-603.00]	5-1933403-0	15.24 [50.00]
304.8 [12]	12192.0-12268.2 [480.00-483.00]	4-1933403-0	12.19 [40.00]
304.8 [12]	9144.0-9220.2 [360.00-363.00]	3-1933403-0	9.14 [30.00]
304.8 [12]	7620.0-7696.2 [300.00-303.00]	2-1933403-5	7.62 [25.00]
304.8 [12]	6096.0-6146.8 [240.00-242.00]	2-1933403-0	6.10 [20.00]
304.8 [12]	4572.0-4622.8 [180.00-182.00]	1-1933403-5	4.57 [15.00]
304.8 [12]	3048.0-3073.4 [120.00-121.00]	1-1933403-0	3.05 [10.00]
304.8 [12]	1524.0-1543.0 [60.00-60.75]	1933403-5	1.52 [5.00]
304.8 [12]	1219.2-1231.9 [48.00-48.50]	1933403-4	1.22 [4.00]
304.8 [12]	914.4-927.1 [36.00-36.50]	1933403-3	0.91 [3.00]
304.8 [12]	609.6-622.3 [24.00-24.50]	1933403-2	0.61 [2.00]
304.8 [12]	304.8-317.5 [12.00-12.50]	1933403-1	0.30 [1.00]
B DIM		A DIM	REF DIM

TYPICAL DIMENSIONS (UNLESS OTHERWISE SPECIFIED) ARE IN INCHES. DIMENSIONS IN PARENTHESES ARE IN MILLIMETERS. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.		DWN J MCNEAL 08JAN2008	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK S JONES 08JAN2008	NAME CABLE ASSEMBLY, LINE ENTRY 3-3-2	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S JONES 08JAN2008	SIZE 108-1234	
0 PLC ±		PRODUCT SPEC	APPLICATION SPEC	
1 PLC ±		114-6039	WEIGHT	
2 PLC ±		114-6039	CUSTOMER DRAWING	
3 PLC ±		114-6039	SCALE 1:1	
4 PLC ±		114-6039	SHEET 1 OF 1	
ANGLES		114-6039	REV D	
FINISH		114-6039		